

CM® Hoist Test Stand

12 Ton Capacity

The Value-Priced, Hydraulic Hand Operated Test Stand — Tests Hoist Capacity to 12 Tons

The Value-Priced CM Test Stand is specially designed for the testing of hoisting equipment as required by the applicable sections of ASME Code B30.16 “Overhead Hoists”, as well as other related lifting equipment after repair or inspections are performed. Unlike other test stands on the market that weigh thousands of pounds, the CM Value-Priced Test Stand weighs only 496 pounds. Portability for on-site testing becomes more practical. Fewer wearing parts provide superior performance.

- Hand operated hydraulic pump eliminates the need for electrical power.
- Capable of applying test loads up to 12 tons.
- Compact, self-contained design for portability and on-site testing.
- Eliminates the need for cumbersome test weights.
- Capable of both static and dynamic testing.
- Tests the function of overload devices.
- Rugged steel frame construction for strength and durability.
- High quality, high strength, hydraulic cylinder made from chromium-molybdenum steel, heat treated for long life and chrome plated for added protection.
- Two-stage, quick action hand pump for ease of operation.
- Fine adjustment pressure valve for accurate load testing.
- Large pressure gauge for easy reading.

technical data

Hydraulic Cylinder (hollow)

Type	• Single acting, spring return
Maximum pulling force	• 12 tons @ 5800 p.s.i.
Stroke	• 6 in.
System pressure	• 0 - 5800 p.s.i.
Center hole diameter	• .87 in.

Hydraulic Hand Pump

System pressure	• 0 - 6090 p.s.i.
Reservoir	• 1.47 pints
Valve	• Two-stage, fine adjustment pressure preset
Gauge	• Glycerin filled - 3.94 in. dia.

Frame	• Mounting holes in base for permanent mount
-------	--


Total Weight	• 496 lbs.
--------------	------------



12 Ton Test Stand
Order Finish Code 1200

Made In USA

dimensional drawing 12 Ton Test Stand

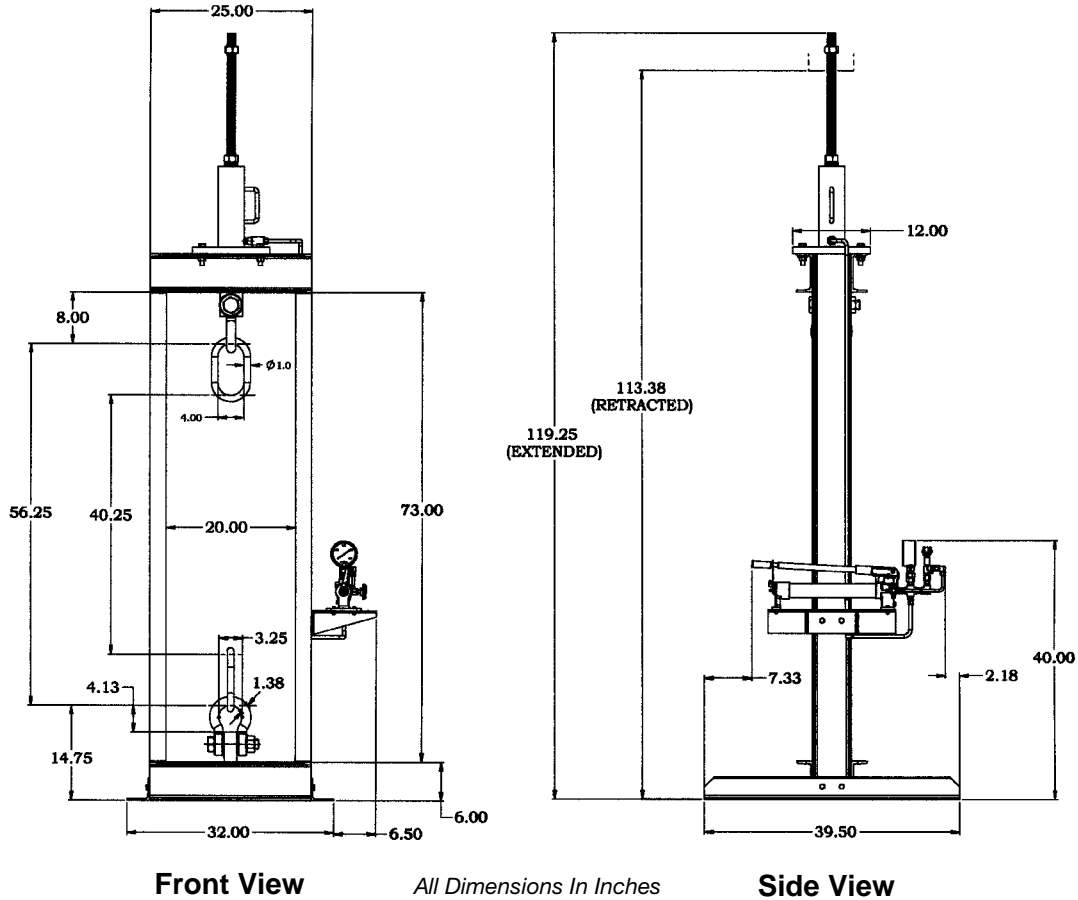

CM Industrial Warranty

All Columbus McKinnon (CM) units are thoroughly inspected and performance tested prior to shipment. If any properly maintained unit develops a performance problem due to a material or workmanship defect, as verified by Columbus McKinnon, repair or replacement of the unit will be made to the original purchaser without charge. This repair / replacement policy applies only to the industrial line of units installed, maintained, and operated as outlined in the applicable accompanying CM manual, and specifically excludes normal wear, abuse, improper installation, improper or inadequate maintenance, hostile environmental effects, and unauthorized repairs / modifications.

⚠ WARNING
OVERLOADING AND IMPROPER USE CAN RESULT IN INJURY
TO AVOID INJURY: <ul style="list-style-type: none"> • Do not exceed maximum pulling force of 12 Tons.



Columbus McKinnon Corporation
 Industrial Products Division
 140 John James Audubon Parkway
 Amherst, New York 14228-1197 USA

Phone (800) 888-0985
Fax (716) 689-5644

Columbus McKinnon Limited
 11 Brook Road North
 P.O. Box 1106
 Cobourg, Ontario K9A4W5 Canada

Phone (800) 263-1997
Fax (905) 372-3078