





## Buoy Chain

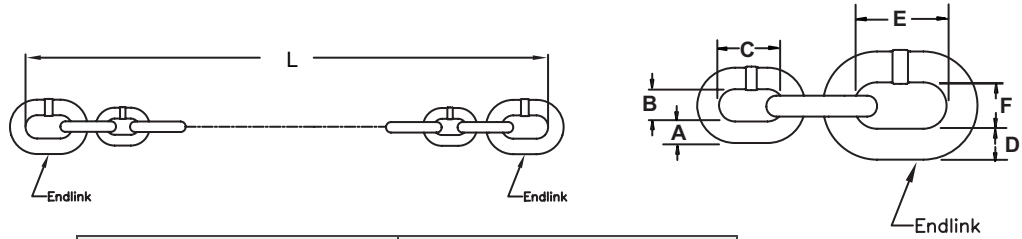

Chain Size	Working Load Limit	Product Code	Chain Dimensions			Endlink Dimensions				Finish	Weight
			L	A	B	C	D	E	F		
<b>Imperial</b>											
in.	lb.		ft.	in.	in.	in.	in.	in.	in.		lb. / ft.
1/2	15,000	6510049	90	0.500	3.00	1.875	0.750	4.50	2.688	Self Colored	2.15
1/2	15,000	6510048	45	0.500	3.00	1.875	0.750	4.50	2.688	Self Colored	2.15
3/4	32,000	6510050	90	0.750	4.50	2.688	0.875	5.25	3.125	Self Colored	4.80
3/4	32,000	6510051	45	0.750	4.50	2.688	0.875	5.25	3.125	Self Colored	4.80
1	58,000	4340890	90	1.000	6.00	3.583	1.000	4.08	1.563	Self Colored	8.60
1	58,000	4340890G	90	1.000	6.00	3.583	1.000	4.08	1.563	Hot dipped Galvanizec	9.60
1-1/8	77,000	4340990	90	1.125	6.75	4.000	1.125	4.59	1.750	Self Colored	10.80
1-1/4	91,000	4341090	90	1.250	7.50	4.438	1.250	5.10	1.938	Self Colored	13.50

## Mooring Chain

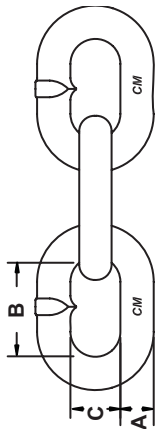

- Standard drum pack available
- Hot dipped galvanized provides long lasting finish

Chain Size	Minimum Break	Product Code	Quantity Per Drum	A	B	C	Finish	App. Weight	App. No of links
<b>Imperial</b>									
in.	lb.			in.	in.	in.		lb. / ft.	per ft.
3/8	4,100	671393LL	200	0.406	1.688	0.650	Hot dipped Galvanized	1.41	7.14
1/2	7,000	671345LL	200	0.531	2.050	0.885	Hot dipped Galvanized	2.48	5.85
5/8	9,800	671346LL	150	0.625	2.600	0.890	Hot dipped Galvanized	3.21	4.62
3/4	14,100	671347LL	100	0.750	2.955	1.120	Hot dipped Galvanized	4.82	4.06

## Deep water mooring system

Water Depth	Ground Chain	Nylon Pendant
<b>Imperial</b>		
ft.	ft.	ft.
750	495 (5-1/2 SHOTS)	620
500	360 (4 SHOTS)	390
250	270 (3 SHOTS)	140

### Notes:

1. Allowance is made for 7% permanent elongation in nylon pendant.
2. Ground chain and nylon pendant lengths must be adjusted to give the min. bottom clearance for specific water depths.
3. Connections made with D type safety shackles.
4. Nylon pendant eyes encapsulated and supplied with Newco type thimbles.

