



Recovery J-Hook Assemblies



In 1997 Dixie Industries revolutionized the **G70 FORGED ALLOY J HOOK** (Patent 5564766).

In 2005 we introduced the **RECOVERY J HOOK ASSEMBLY**.

- Patented I beam profile Towing 15" Clevlok Alloy J Hook
- Designed for use with 3/8" G80 Alloy Chain
- G80 Heat treated and proof tested with 7,100 lb. WLL (the highest in the industry).
- ClevLoc style head, no catch points
- Patented nose design reduces hook slippage on chain
- Load rest reduces load rolling out of hook bowl (load must be behind rest)
- Designed for the professional towing
- G80 Proof Loaded Assemblies
- All mechanical connection...no welded links

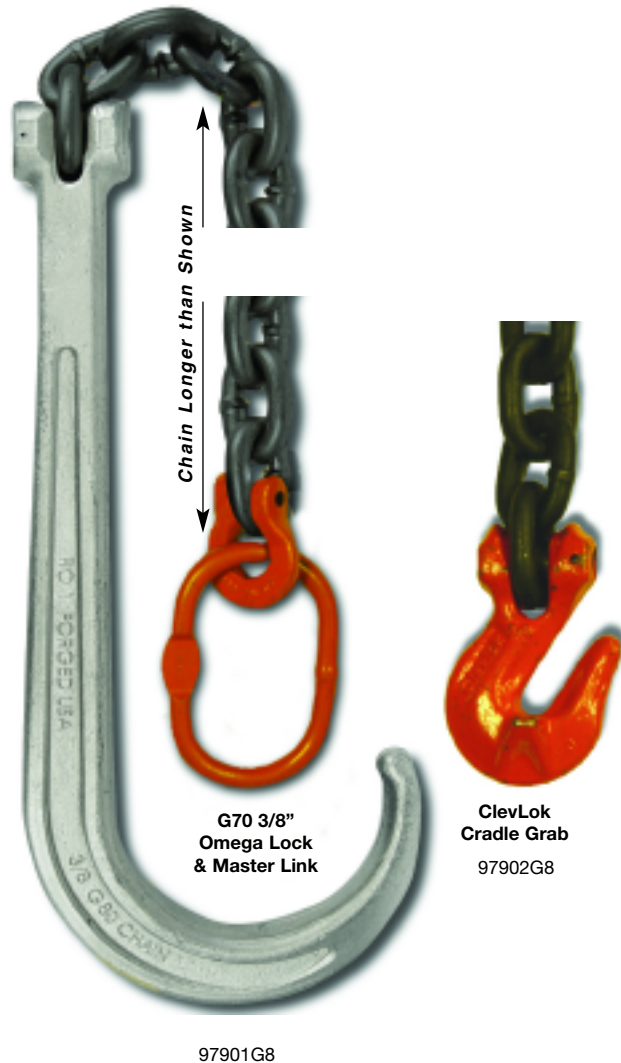

Product Code	Size (In. / mm)	Chain Length	Description	Working Load Limit (Lbs.)
97901G8	3/8"	SC 10 ft.	Omega Lock and Master Link	7,100
97902G8	3/8"	SC 10 ft.	ClevLoc Cradle Grab	7,100

WARNING

IMPROPER USE AND CARE OF CHAIN SLINGS CAN RESULT IN BODILY INJURY.

TO AVOID INJURY: Never exceed the working load limit. Always inspect sling before each use. Do not impact load or jerk from sling. Protect chain from sharp corners and objects. Protect slings from corrosion.