


CHESTER HOIST

WORM DRIVE HOIST
DATA SHEET E-29AS

CAPACITY 4-5 TON

LOW HEADROOM
MOTORIZED TROLLEY - T

SINGLE HOOK MONORAIL
2-PART DOUBLE

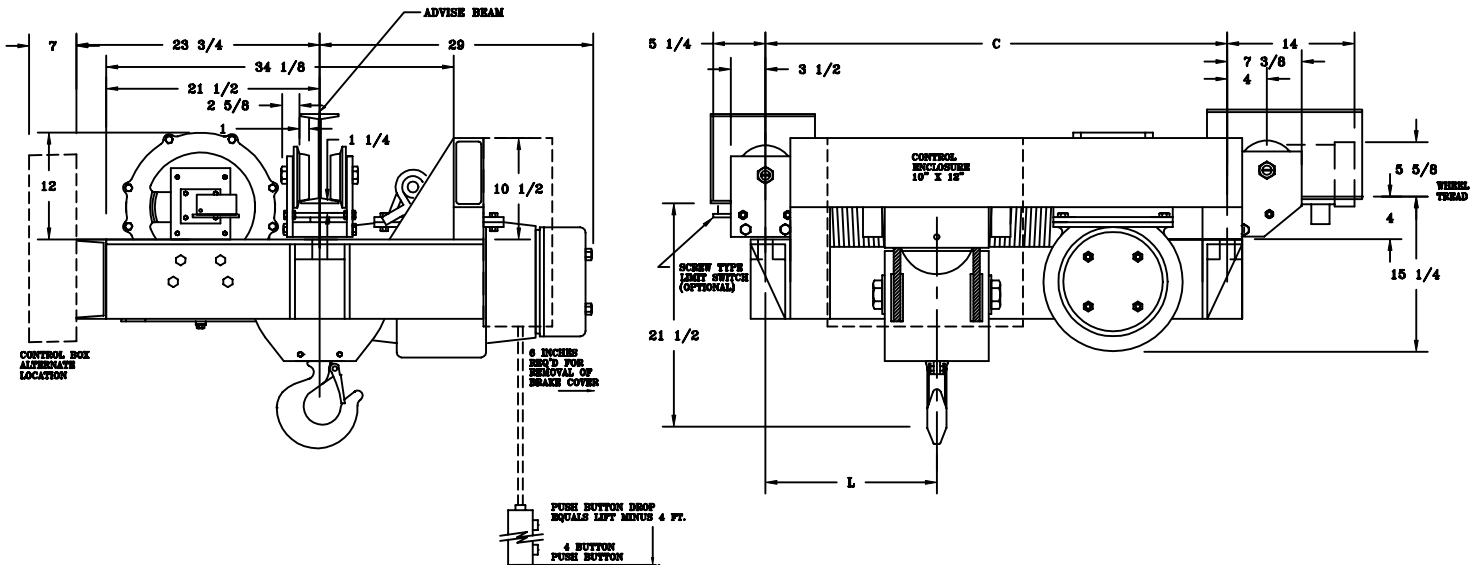

ALL DIMENSIONS IN INCHES

MODEL NUMBER	CAPACITY (lbs.)	SPEED (fpm)	LIFT (ft.)	REEVING	MOTOR (hp)	C	L	ST'D. I-BEAM		APPROX. WT. (lbs.)
								SIZE	CLEAR*	
WDMT-84S	8000	20	15	2PD-3/8	7 1/2 @ 1200	50 5/8	17 1/2	7-24	1/2	2300
WDMT-85S	8000	20	25	2PD-3/8	7 1/2 @ 1200	59 5/8	22	7-24	1/2	2400
WDMT-85AS	8000	20	35	2PD-7/16	7 1/2 @ 1200	65 5/8	25	7-24	1/2	2500
WDMT-85BS	8000	20	50	2PD-7/16	7 1/2 @ 1200	77 5/8	31	7-24	1/2	2600
WDMT-85CS	8000	20	75	2PD-7/16	7 1/2 @ 1200	89 5/8	37	7-24	1/2	2700
WDMT-107S	10000	20	15	2PD-7/16	10 @ 1200	50 5/8	17 1/2	7-24	1/2	2400
WDMT-108S	10000	20	25	2PD-7/16	10 @ 1200	59 5/8	22	7-24	1/2	2500
WDMT-108AS	10000	20	35	2PD-7/16	10 @ 1200	65 5/8	25	7-24	1/2	2600
WDMT-108BS	10000	20	50	2PD-7/16	10 @ 1200	77 5/8	31	7-24	1/2	2700
WDMT-108CS	10000	20	75	2PD-3/8E	10 @ 1200	89 5/8	37	7-24	1/2	2800

* CLEARANCE BASED ON MAX. "S" BEAM SIZE 24" @ 100 LBS.
TROLLEYS FOR OTHER I-BEAMS AND PATENTED TRACKS ARE AVAILABLE.
MAXIMUM BEAM FLANGE WIDTH 7 1/2 INCHES.
NOTE: WHEN USING SCREW TYPE LIMIT SWITCH ADD 1 INCH TO HEADROOM.