


# Skidding

**Specially shaped** to grab and hold poles and logs for skidding and dragging operations.

Upset forged from round steel to position additional steel at critical stress areas. Points are fine ground to assure long lasting sharpness.

Tong sizes 3/4 and 1 inch are supported by a special Tong Shut. Tong sizes 1 1/4 and 1 1/2 inches use screw pin anchor shackles.

Two configurations are available.

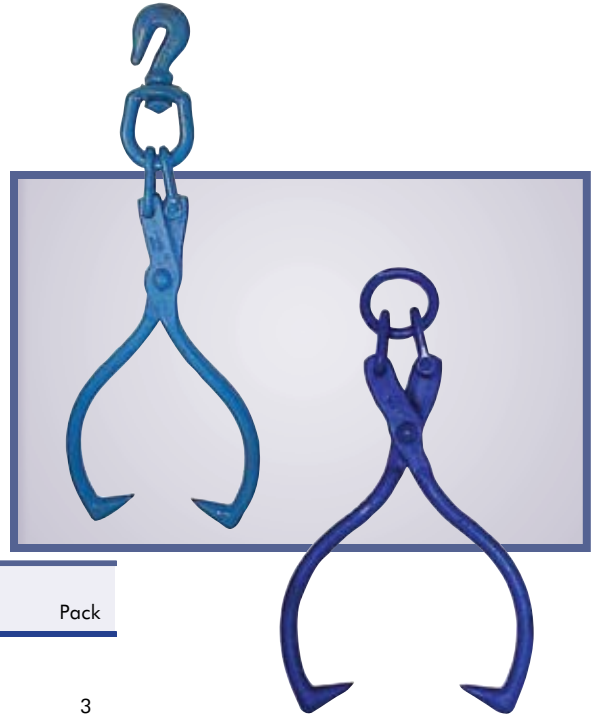

Item #	Material Diameter	Ring Size	Opening Minimum	Opening Maximum	Approx. Weight	Pack
<b>Ring Only</b>		<b>Ring Size</b>				
40005	3/4"	1/2"	3 9/16"	16"	7.0 lbs.	3
42315	1"	5/8"	4"	20"	12.8 lbs.	3
40225	1"	5/8"	4 1/2"	25"	14.3 lbs.	3
40455	1 1/4"	7/8"	7"	32"	28.8 lbs.	1
40555	1 1/2"	1"	8"	36"	48.0 lbs.	1
<b>Swivel Grab</b>		<b>Hook Size</b>				
40004	3/4"	3/8"	3 9/16"	16"	7.9 lbs.	3
42314	1"	3/8"	4"	20"	13.3 lbs.	3
40224	1"	3/8"	4 1/2"	25"	15.3 lbs.	3
40454	1 1/4"	1/2"	7"	32"	29.7 lbs.	1

**Warning:** Skidding tongs are designed for pulling or dragging. They are not load rated and should not be used for overhead lifting. Do not heat tong points to sharpen them.



# Logger Style

**Designed for tree length logging.** Logger style tong's unique design places additional material at stress points.

Made from alloy steel for maximum strength and durability. Points are shaped to make hooking and unhooking easy while assuring holding strength. Tong is supported with heat treated ring attached by shackles.

Item #	Material Diameter	Ring Size	Opening Minimum	Opening Maximum	Approx. Weight	Pack
42805	1 1/4"	7/8"	7"	16"	24.5 lbs.	1
42825	1 1/2"	1"	7 1/2"	22"	33.8 lbs.	1

**Warning:** Not for overhead lifting.

