


CHESTER HOIST

WORM DRIVE HOIST
DATA SHEET E-203AS

CAPACITY 3-4-5-7 1/2 TON

STANDARD HEADROOM
LUG TYPE-T

TWIN HOOK MONORAIL
2-PART SINGLE

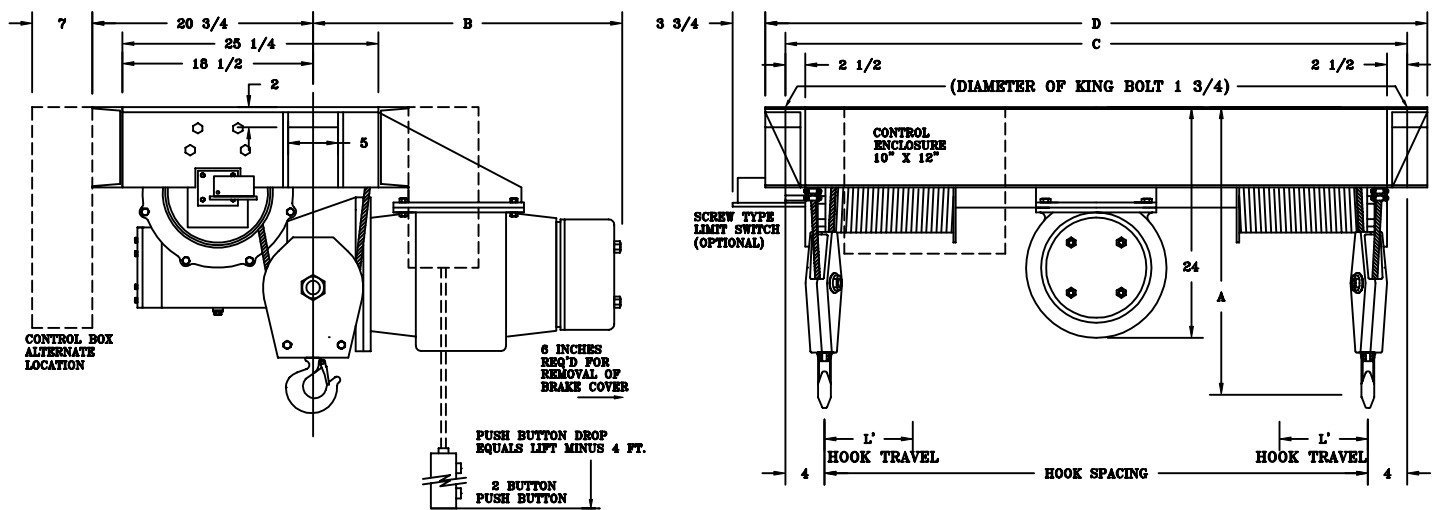

ALL DIMENSIONS IN INCHES

MODEL NUMBER	CAPACITY (lbs.)	SPEED (fpm)	LIFT (ft.)	REEVING	MOTOR (hp)	A	B	C	D	L'	M	MAX. HOOK SPACING	MIN. HOOK SPACING	APPROX. WT. (lbs.)
WD-363S	6000	32	20	2PS-3/8	10 @ 1800	28	32	50	53	6	2	144	42	1000
WD-364S	6000	32	40	2PS-3/8	10 @ 1800	28	32	67	70	10 1/2	2	144	59	1150
WD-365S	6000	32	60	2PS-3/8	10 @ 1800	28	32	85	88	14 1/2	2	144	77	1300
WD-383S	8000	21	20	2PS-3/8	10 @ 1200	28	32	50	53	6	2	144	42	1400
WD-384S	8000	21	40	2PS-3/8	10 @ 1200	28	32	67	70	10 1/2	2	144	59	1550
WD-385S	8000	21	60	2PS-3/8	10 @ 1200	28	32	85	88	14 1/2	2	144	77	1700
WD-3106S	10000	30	20	2PS-7/16	15 @ 1800	28	32	50	53	6	2	144	42	1400
WD-3107S	10000	30	40	2PS-7/16	15 @ 1800	28	32	67	70	10 1/2	2	144	59	1550
WD-3108S	10000	30	60	2PS-7/16	15 @ 1800	28	32	85	88	14 1/2	2	144	77	1700
WD-3150S	15000	20	20	2PS-7/16E	15 @ 1200	31	34	50	53	6	2	144	42	1550
WD-3151S	15000	20	40	2PS-7/16E	15 @ 1200	31	34	67	70	10 1/2	2	144	59	1700
WD-3152S	15000	20	60	2PS-7/16E	15 @ 1200	31	34	85	88	14 1/2	2	144	77	1850

"C" & "D" DIMENSION AND WEIGHTS BASED ON MIN. HOOK SPACING
NOTE: WHEN USING SCREW TYPE LIMIT SWITCH ADD 1 INCH TO HEADROOM.