



# CHESTER HOIST

WORM DRIVE HOIST  
DATA SHEET E-32AS

## CAPACITY 10-15 TON

STANDARD HEADROOM  
LUG TYPE-T

TWIN HOOK MONORAIL  
4-PART SINGLE

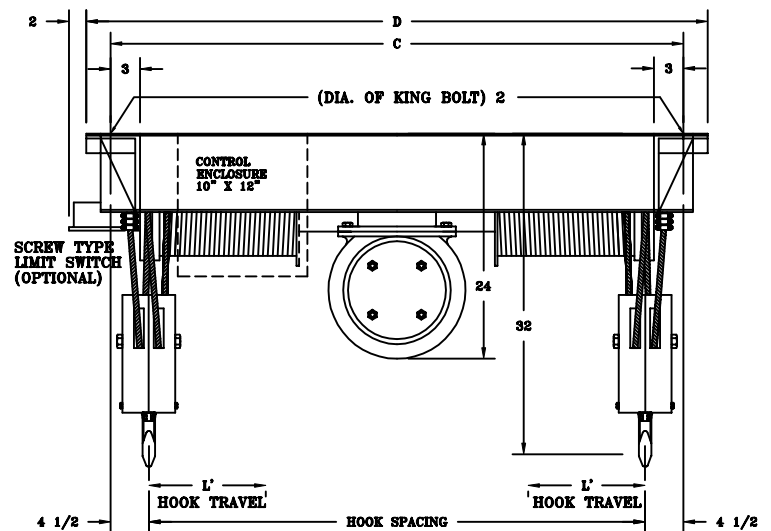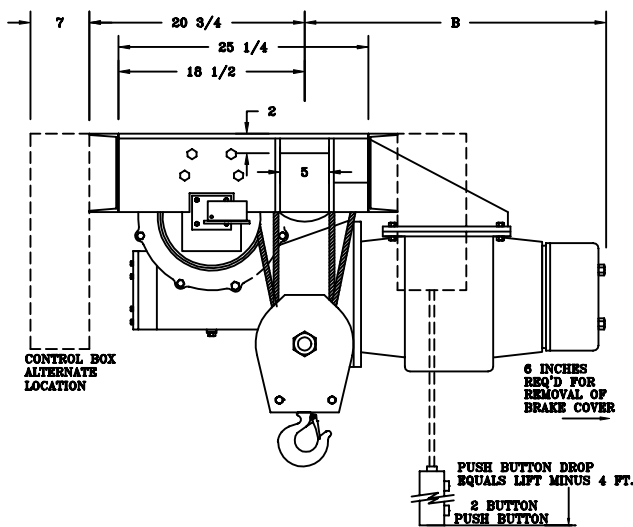

ALL DIMENSIONS IN INCHES

MODEL NUMBER	CAPACITY (lbs.)	SPEED (fpm)	LIFT (ft.)	REEVING	MOTOR (hp)	B	C	D	L'	MAX. HOOK SPACING	MIN. HOOK SPACING	APPROX. WT. (lbs)
WD-3200S	20000	10	10	4PS-7/16	10 @ 1200	32	51	55 1/2	3	144	42	1600
WD-3201S	20000	10	20	4PS-7/16	10 @ 1200	32	68	72 1/2	5 1/4	144	59	1800
WD-3202S	20000	10	30	4PS-7/16	10 @ 1200	32	86	90 1/2	7 1/4	144	77	2000
WD-3203S	20000	15	10	4PS-7/16	15 @ 1800	32	51	55 1/2	3	144	42	1600
WD-3204S	20000	15	20	4PS-7/16	15 @ 1800	32	68	72 1/2	5 1/4	144	59	1800
WD-3205S	20000	15	30	4PS-7/16	15 @ 1800	32	86	90 1/2	7 1/4	144	77	2000
WD-3300S	30000	10	10	4PS-7/16E	15 @ 1200	34	51	55 1/2	3	144	42	1600
WD-3301S	30000	10	20	4PS-7/16E	15 @ 1200	34	68	72 1/2	5 1/4	144	59	1800
WD-3302S	30000	10	30	4PS-7/16E	15 @ 1200	34	86	90 1/2	7 1/4	144	77	2000

"C" & "D" DIMENSION AND WEIGHTS BASED ON MIN. HOOK SPACING  
NOTE: WHEN USING SCREW TYPE LIMIT SWITCH ADD 1 INCH TO HEADROOM.