

CM wall jib crane kits

CM flexible cable type jib crane kits


These kits let you build low-cost wall or column mounted swinging bracket jib arms. The flexible cable supports the free end of the boom. Kits come complete except for the S-beam and feature:



- Top bearing bracket and pintle assembly
- Flexible tension member with clamps
- Lower bearing bracket and pintle assembly
- Boom end assembly and tension adjuster
- Kit 20 for jib arms up to 3100 lbs. capacity* with 10 ft. reach or 1500 lbs. capacity* with 20 ft. reach. Accommodates 6" or 8" beams
- Kit 22 for jib arms up to 6100 lbs. capacity* with 10 ft. reach or 3200 lbs. capacity* with 20 ft. reach. Accommodates 10" or 12" beams
- Made in U.S.A.

CM rigid tie rod type jib crane kits

These kits let you build low-cost wall or column mounted swinging bracket jib arms. The tie rod supports the free end of the boom. Kits come complete except for the S-beam and tie rod and feature:

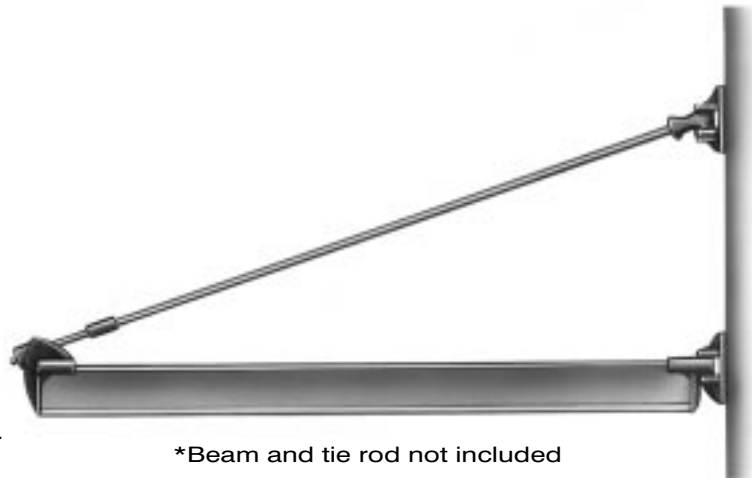

*Beam and tie rod not included

- Top bearing bracket and pintle assembly
- Coupling (for splicing tie rod when necessary)
- Lower bearing bracket and pintle assembly
- Boom end assembly and tension adjuster
- Kit 20A for jib arms up to 3100 lbs. capacity* with 10 ft. reach or 1500 lbs. capacity* with 20 ft. reach. Accommodates 6" or 8" beams
- Kit 22A for jib arms up to 6100 lbs. capacity* with 10 ft. reach or 3200 lbs. capacity* with 20 ft. reach. Accommodates 10" or 12" beams
- Made in U.S.A.

* **WARNING**

Overloading and improper use can result in injury.

To avoid injury:

- Do not exceed working load limit, load rating or capacity.
- Do not use to lift people or loads over people.
- Use only alloy chain for overhead lifting.
- Read and follow all instructions.